
## PIPE CHIME BAG

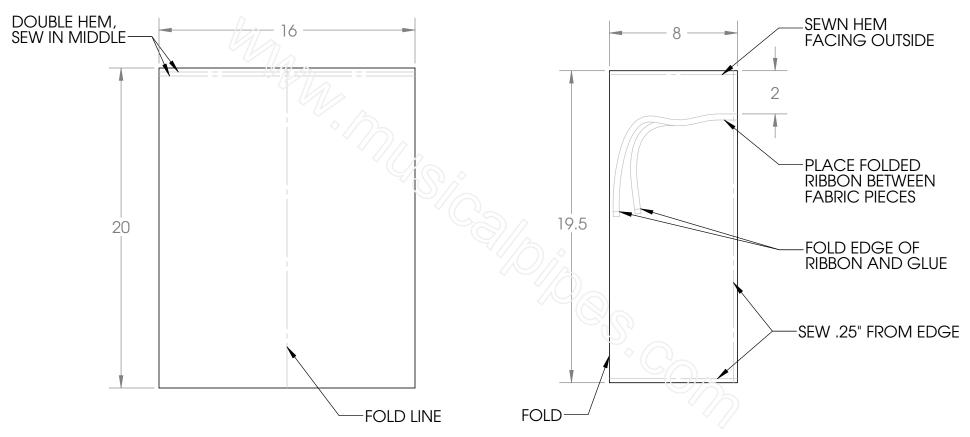

## **INSTRUCTIONS**

- CUT MATERIAL 16" X 20".
- PLACE FABRIC RIGHT SIDE DOWN.
- 3. DOUBLE HEM THE TOP BY FOLDING THE TOP EDGE TWICE (.25" EACH) AND SEW IN THE MIDDLE.
- 4. FOLD FABRIC IN HALF WITH RIGHT SIDES TOGETHER (FOLDED HEM IS ON THE OUTSIDE OF BAG).
- 5. CUT RIBBON 21" LONG.
- 6. FOLD RIBBON IN HALF WITH PATTERN FACING EACH OTHER ON THE INSIDE (IF APPLIES).
- 7. PLACE RIBBON BETWEEN FABRIC PIECES 2" FROM THE TOP OF THE HEMED EGDE AND PLACE THE FOLDED EDGE OF THE RIBBON FLUSH WITH THE OUTSIDE EDGES.
- 8. SEW ALONG THE SIDE AND BOTTOM OF FABRIC .25" FROM THE EDGE.
- 9. FOLD FABRIC INSIDE OUT CREATING YOUR BAG.
- 10. FOLD RIBBON ENDS .25" AND GLUE TO PREVENT FRAYING.

## **MATERIALS**

- 1. 16" X 20" NONSTRETCHING FARIC
- 2. 1/4" OR 3/8" THICK RIBBON (21" LONG)
- 3. THREAD

